



上ぶた式U形側溝本体


JIS A 5372

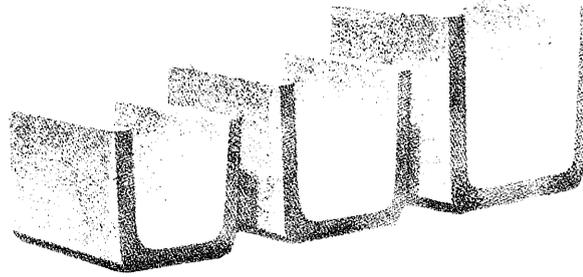

呼び名 180 以下

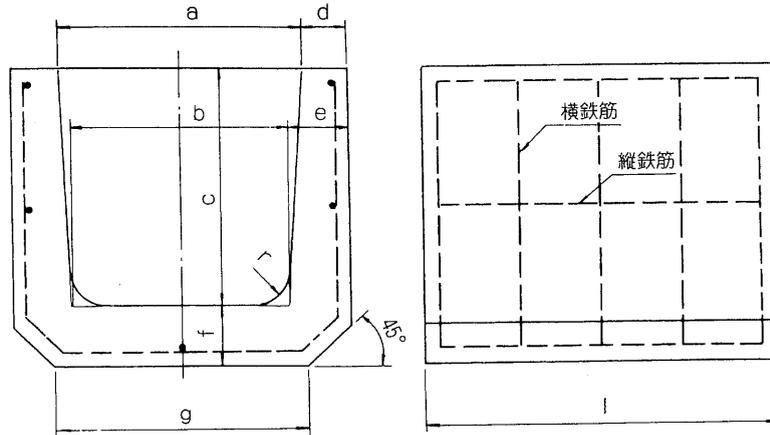

呼び名 240 以上



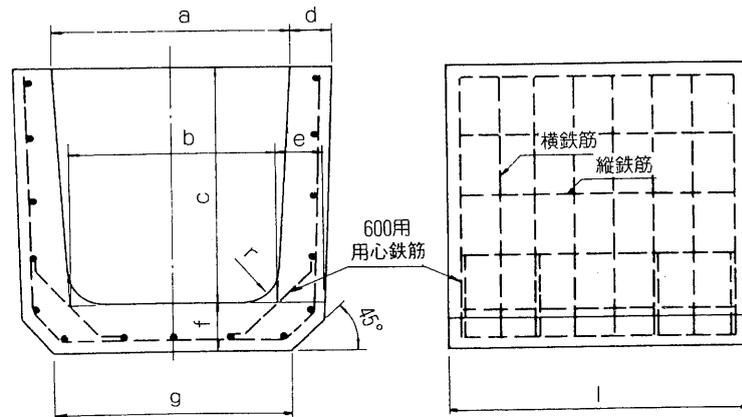


呼び名	寸法 (mm)									鉄筋				重量 (kg)
	a	b	c	d	e	f	g	r	l	縦鉄筋		横鉄筋		
										径	数量 (本)	径	数量 (本)	
鉄筋コンクリートU形種	90	80	90	25	30	25	90	30	600	2.6	3	2.6	3	12
※ 90	90	80	90	25	30	25	90	30	600	2.6	3	2.6	3	12
※ 120	120	110	120	27	32	35	123	30	600	2.6	3	2.6	3	18
150	150	140	150	30	35	35	160	30	600	2.6	5	2.6	5	23
180	180	170	180	35	40	40	190	50	600	2.6	5	3.2	5	33
240	240	220	240	45	50	50	240	50	600	3.2	7	3.2	5	54
300 A	300	260	240	50	60	60	300	50	600	3.2	9	4.0	5	68
300 B	300	260	300	50	60	60	300	50	600	3.2	9	4.0	5	76
300 C	300	260	360	50	60	65	300	50	600	3.2	11	4.0	7	89
360 B	360	310	360	50	65	65	360	50	600	4.0	11	4.0	8	99
450	450	400	450	55	70	70	430	70	600	4.0	13	5.0	8	137
600	600	540	600	70	80	80	600	70	600	6.0	15	6.0	8	208

※ J I S 規格外製品

上ぶた式U形側溝ふた

JIS A 5372

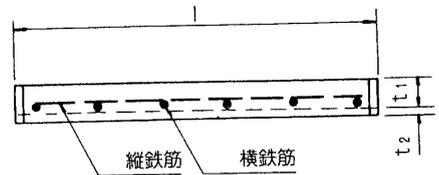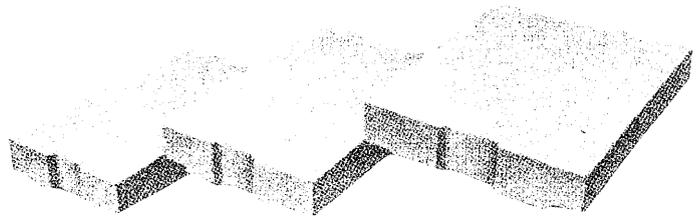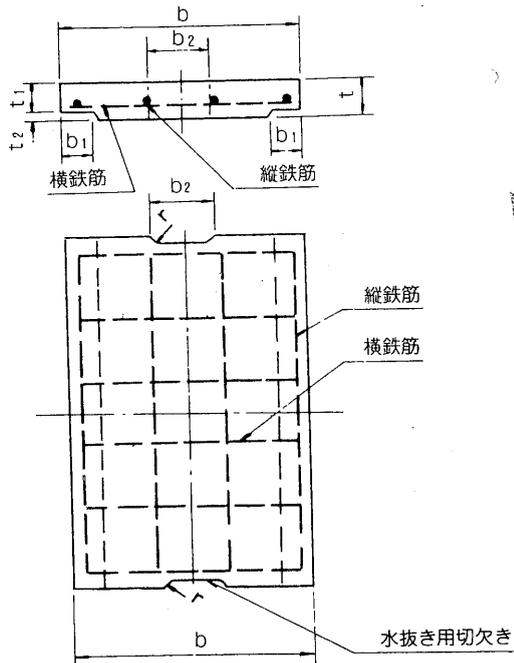

単位 mm

種類	呼び名	寸法 (mm)								鉄筋				重量 (kg)
		b	b ₁	t	t ₁	t ₂	l	r	b ₂	縦鉄筋		横鉄筋		
										径	数量(本)	径	数量(本)	
1 種	※ 90	140	30	30	25.5	4.5	600	15	70	2.6	3	2.6	4	5
	※ 120	174	32	35	30.5	4.5	600	15	75	2.6	3	2.6	4	8
	150	210	35	35	30	5	600	15	75	2.6	3	2.6	5	10
	180	250	40	40	35	5	600	15	75	2.6	3	2.6	6	13
	240	330	50	45	40	5	600	15	90	3.2	4	3.2	6	19
	300	400	55	60	50	10	600	15	100	3.2	4	4.0	6	28
	360	460	55	65	55	10	600	18	120	3.2	4	5.0	6	39
	450	560	60	70	60	10	600	18	120	4.0	5	6.0	5	54
	600	740	75	75	65	10	600	18	150	4.0	6	6.0	6	75
2 種	180	250	40	90	80	10	600	15	75	6.0	3	D 6	6	30
	240	330	50	100	85	15	600	15	90	6.0	3	D 10	5	44
	300	400	55	100	85	15	600	15	100	6.0	4	D 10	5	53
	360	460	55	100	85	15	600	18	120	6.0	5	D 10	6	62
	450	560	60	120	100	20	600	18	120	6.0	6	D 10	6	91
	600	740	75	150	130	20	600	18	150	6.0	6	D 10	6	154

※ J I S 規格外製品

